HSF

NOTES:
Current Rating: 2.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40℃ to +105℃

Contact Material: Brass
Contact plating: Au Or Sn over Ni
Insulator Material: LCP+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

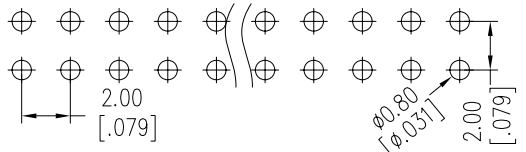

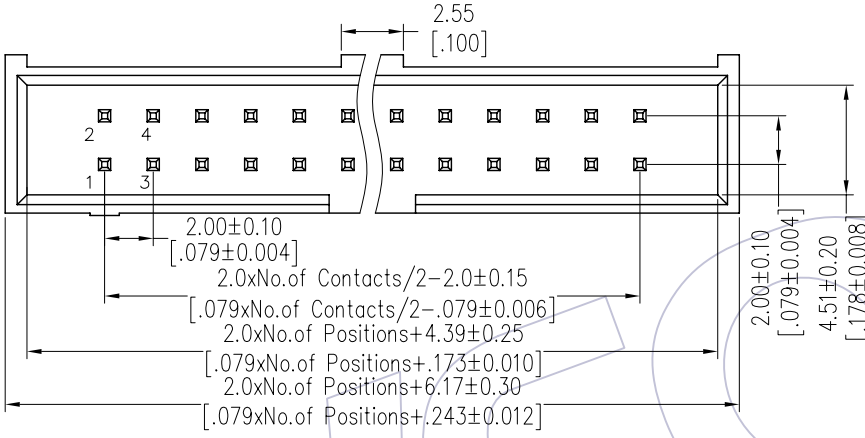

Ordering Information

3124-XX S XX B K00 X 1

No.of Pins	Contact Plating	Color Insulator	Packing
10 30 14 34 16 40 20 44 24 50 26 60	G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin	B=Black W=White	T=Tube

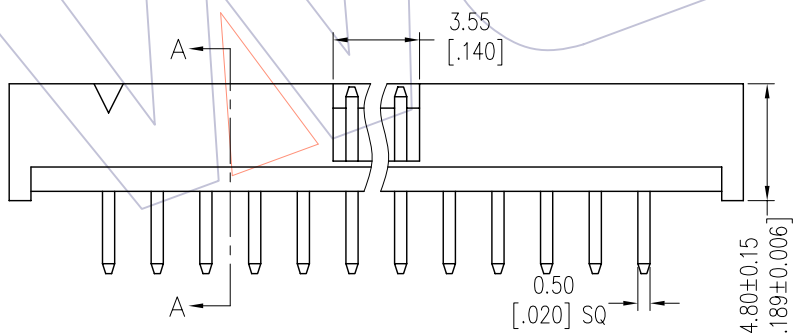

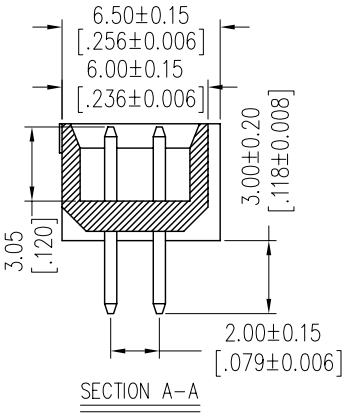

SECTION A-A

Item	Pitch	Mating
Standard	2.00	5225
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/09/24	NEW	------

OPERATION		DRAW	DATE
X.X	±0.40	JYHuang	2012/09/24
X.XX	±0.25	CHECK	DATE
X.XXX	±0.15		
Angle	± 3°	APPROVE	DATE
DIM	TOL		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 3124-XXSXXBK00X1

TITLE: 2.00 BOX HEADER 180° H=4.8 SAMTEC (LONG TYPE)

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com