


NOTES:

1. Body material: Polybutylene Terephthalate, UL94 V-0
2. Contact material: Phosphor bronze, Plated: Gold Flash/Ni
3. Pin material: Brass, Plated: Gold Flash
4. Screw material: Steel, Plated: Ni
5. Rated Voltage: 300V
6. Rated Current: 10A
7. Wire Range: 14-22AWG
8. Screw Torque: 7.0lbf. in
9. Contact Resistance: 8mΩ Max
10. Insulation Resistance: DC1000V 1000MΩ Min
11. Power-Frequency Withstand Voltage: AC2500V/1min
12. Impulse Withstand Voltage: 3000V
13. Operation Temperature: -40°C to +120°C

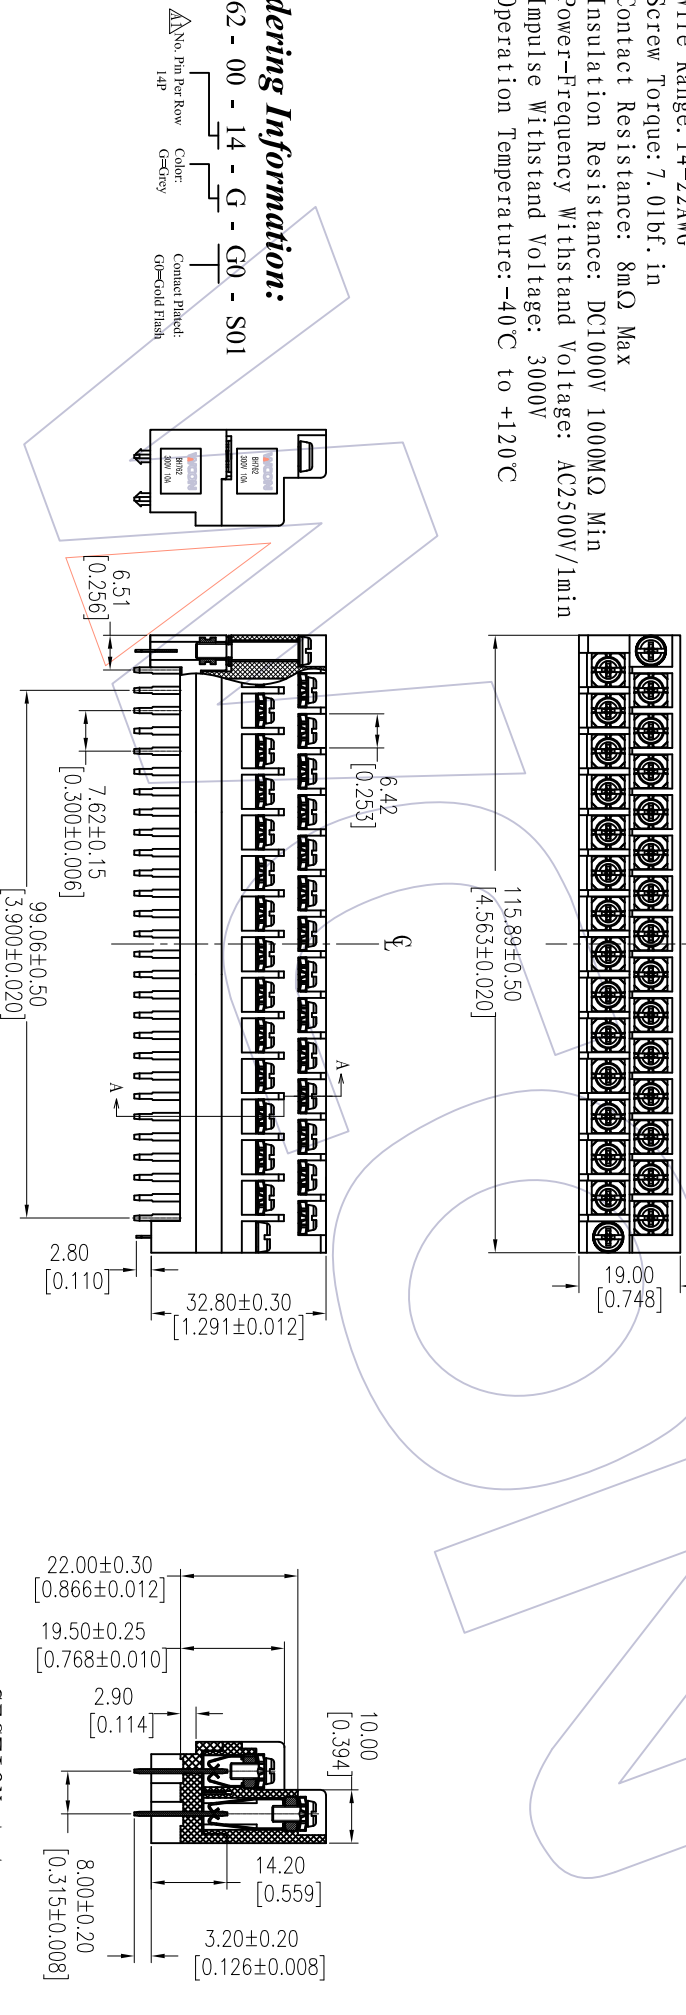

Ordering Information:

BH762 - 00 - 14 - G - G0 - S01

△No. Pin Per Row
14P

Color
G=Grey

Contact Plated:
GP=Gold Flash

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	
						mm	inch
X.X	Tsingsn	2013/09/23	mm	A4	BH762-00-14-G-G0-S01	7.62Pitch*8.00mm, Double-Row,	W/9.00mm*132.80mm, 14Pin Pairs
X.XXX	CHECK	DATE	UNIT	SIZE		Barrier Terminal Blocks	
X.XXX	±0.25		mm	A4			
Angle	APPROVE	DATE	SHEET	1/1	Customer NO.		
± 3'			PROJ.				
DIM	TOL						

SECTION A-A



WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57466408
Fax: +86 512 57468468
E-mail: sales@wcon.com

Http: www.wcon.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2013/09/23	Modify	△
A0	2012/06/01	NEW	